

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

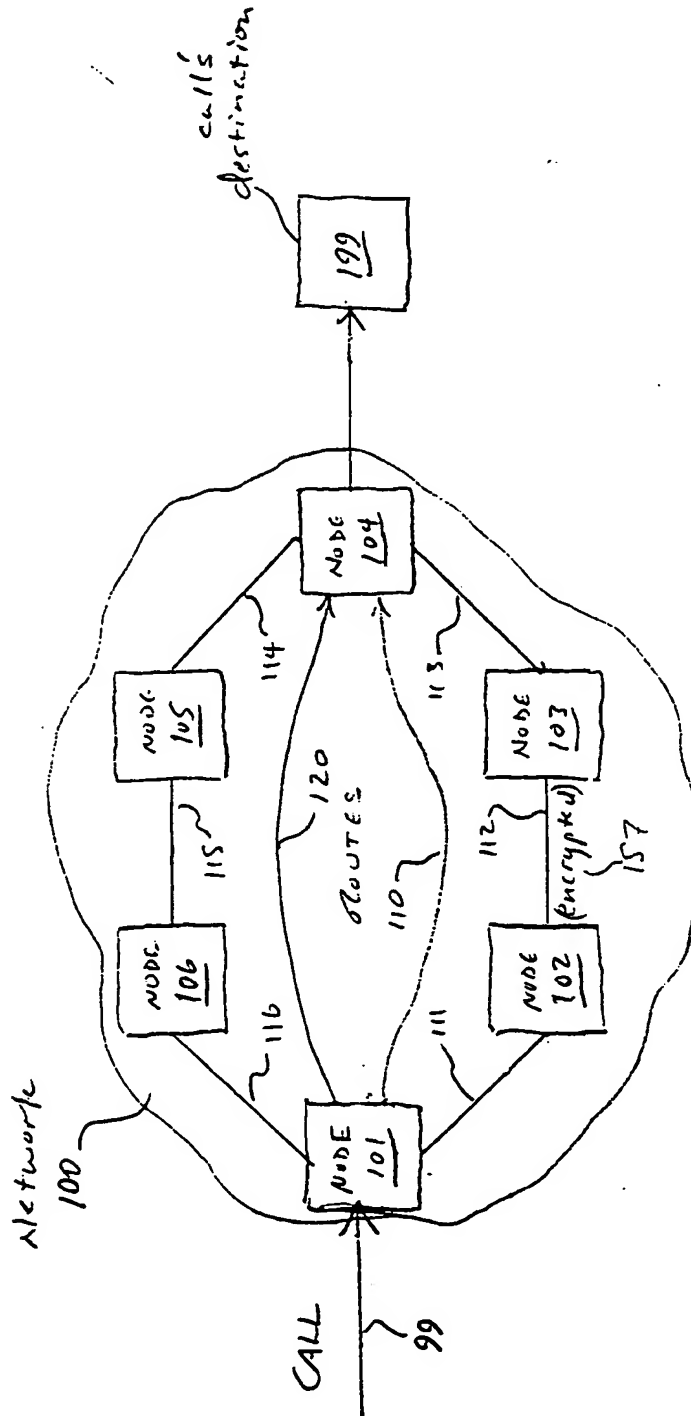


FIG. 1

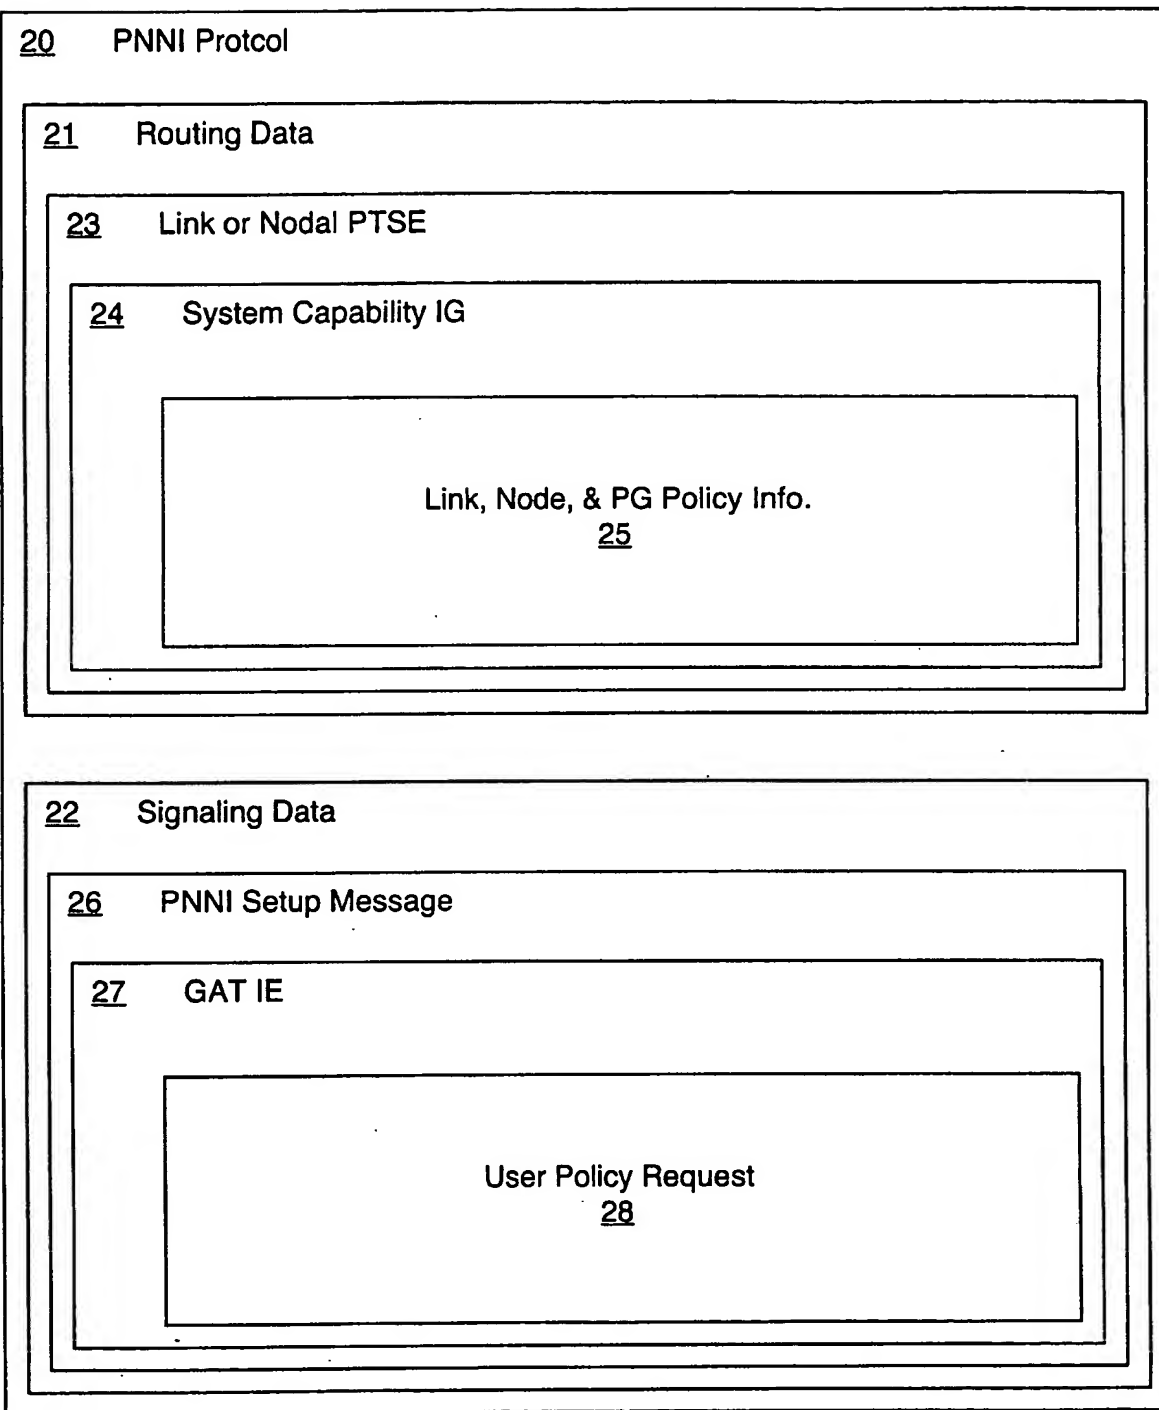


Fig. 2

30 MPG P2W1 NW

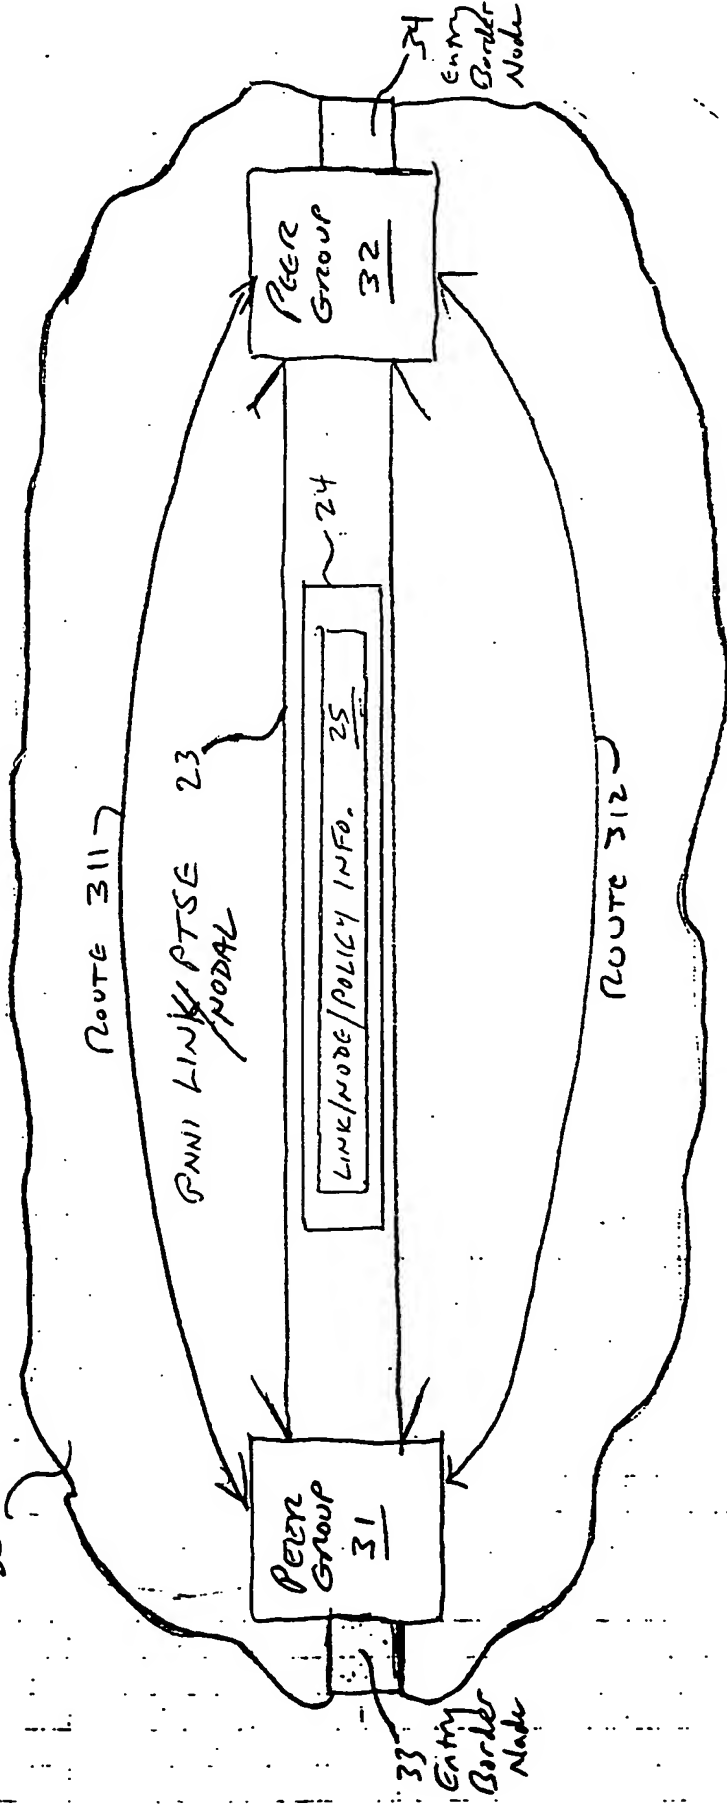


Fig. 3

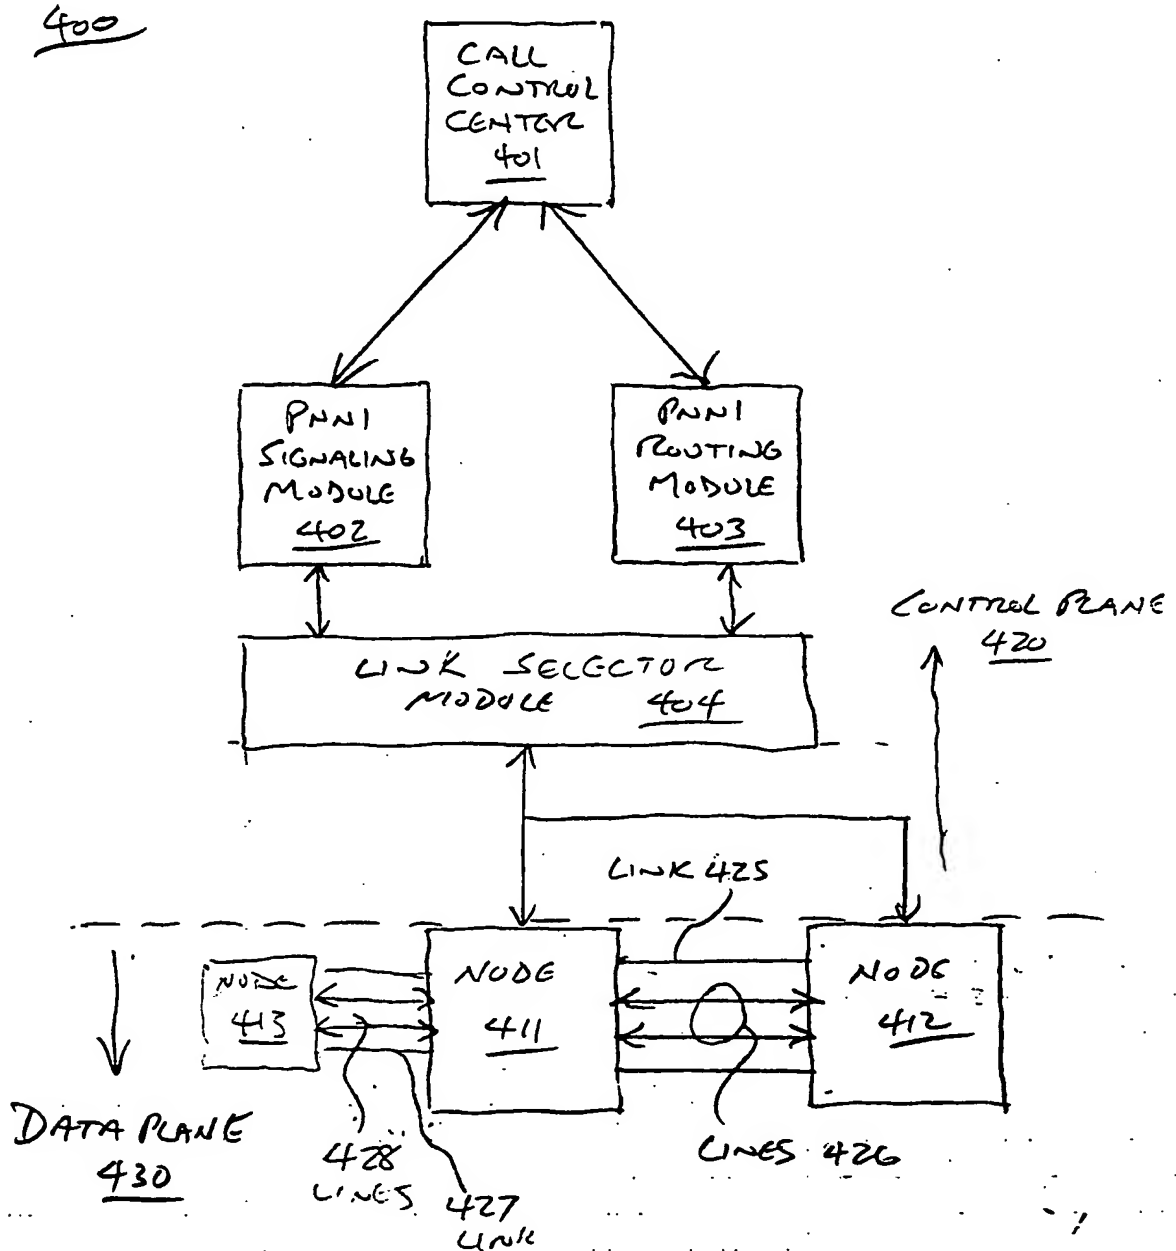


Fig. 4

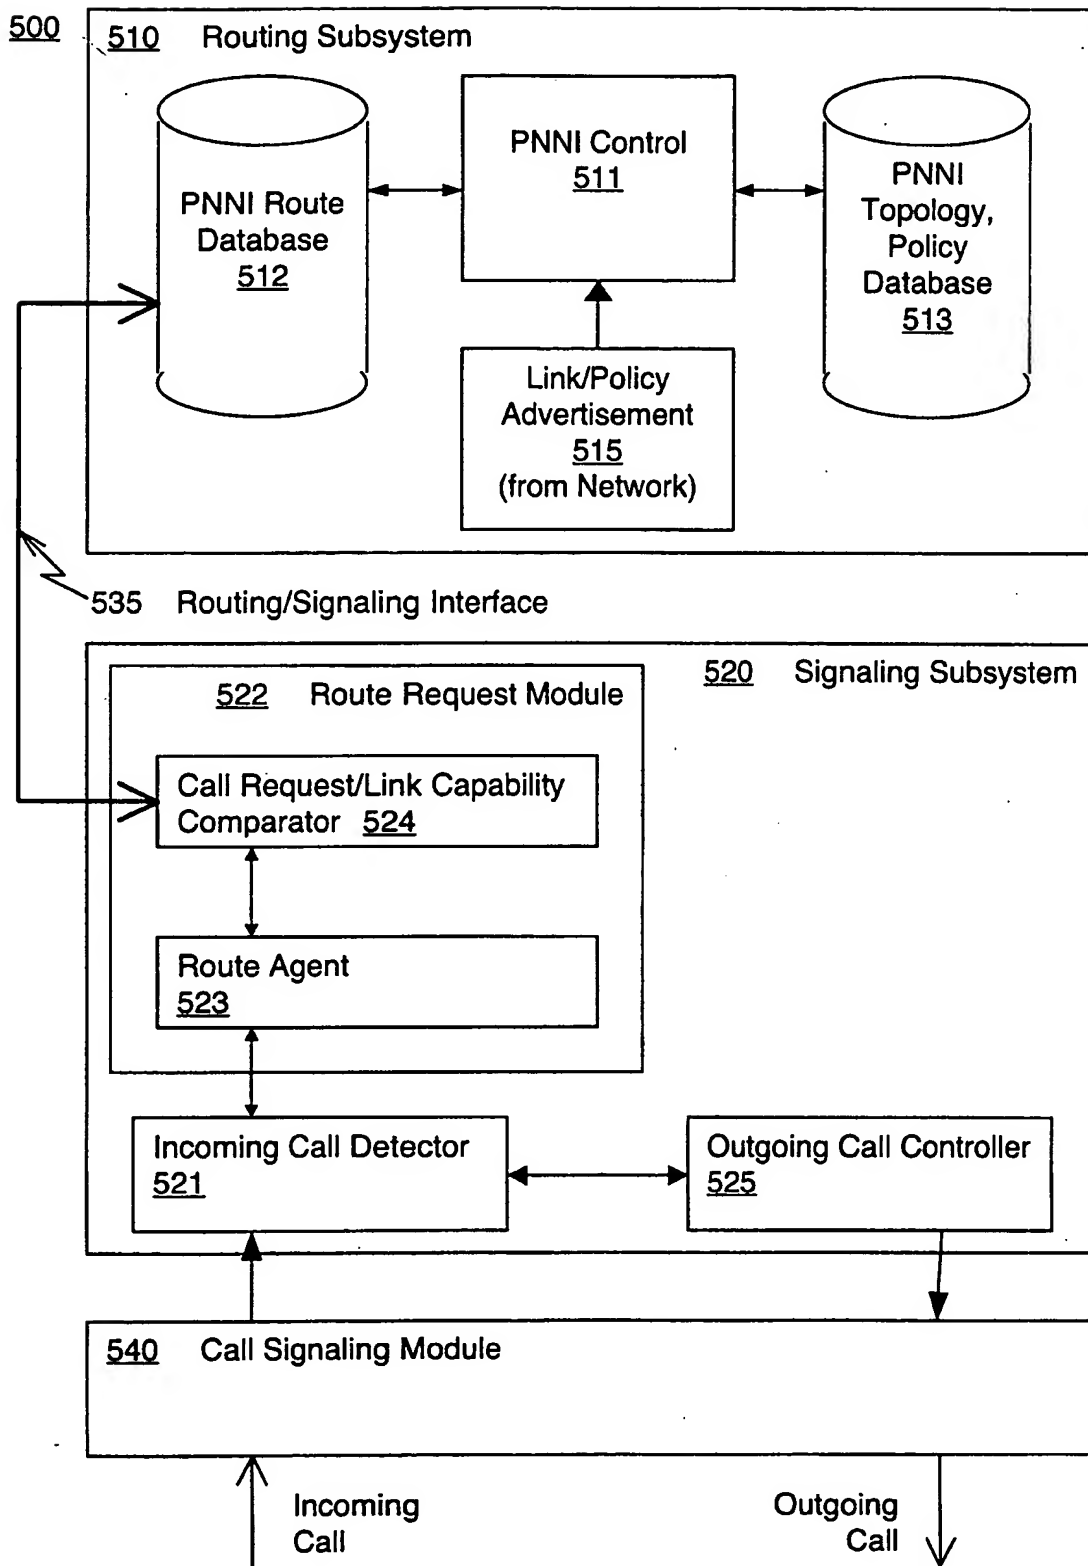


Fig. 5

SYSTEM AND METHOD FOR PROVIDING LINK, NODE AND PG POLICY BASED ROUTING  
IN PNNI BASED ATM NETWORKS

Inventors:

M. Chellappa, C. Krishnamurthy, S. Morrow, C. Pignataro, K. Sundaresan

600 Signaling and Routing

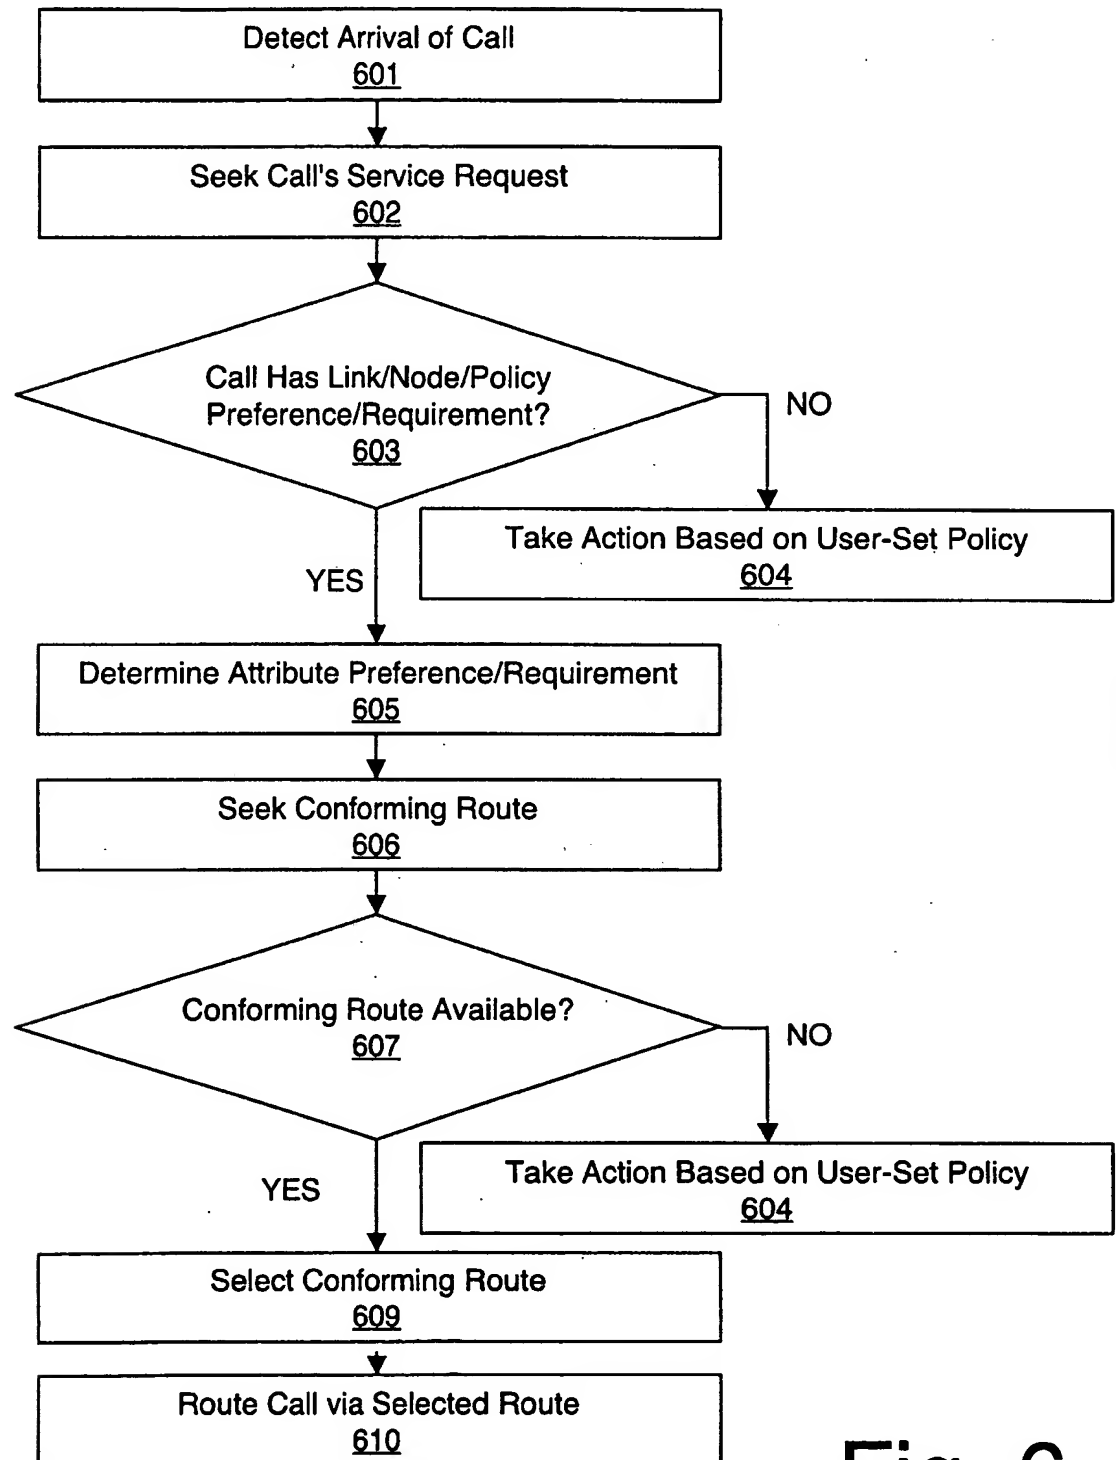
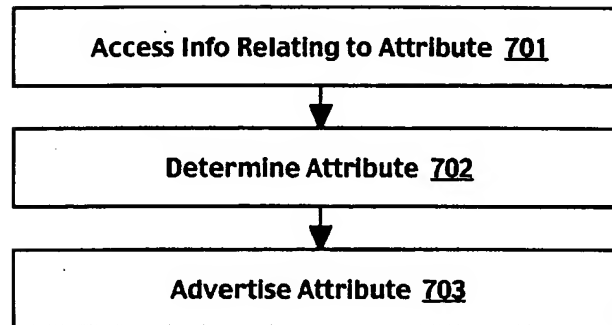



Fig. 6

**700**



**Fig. 7**



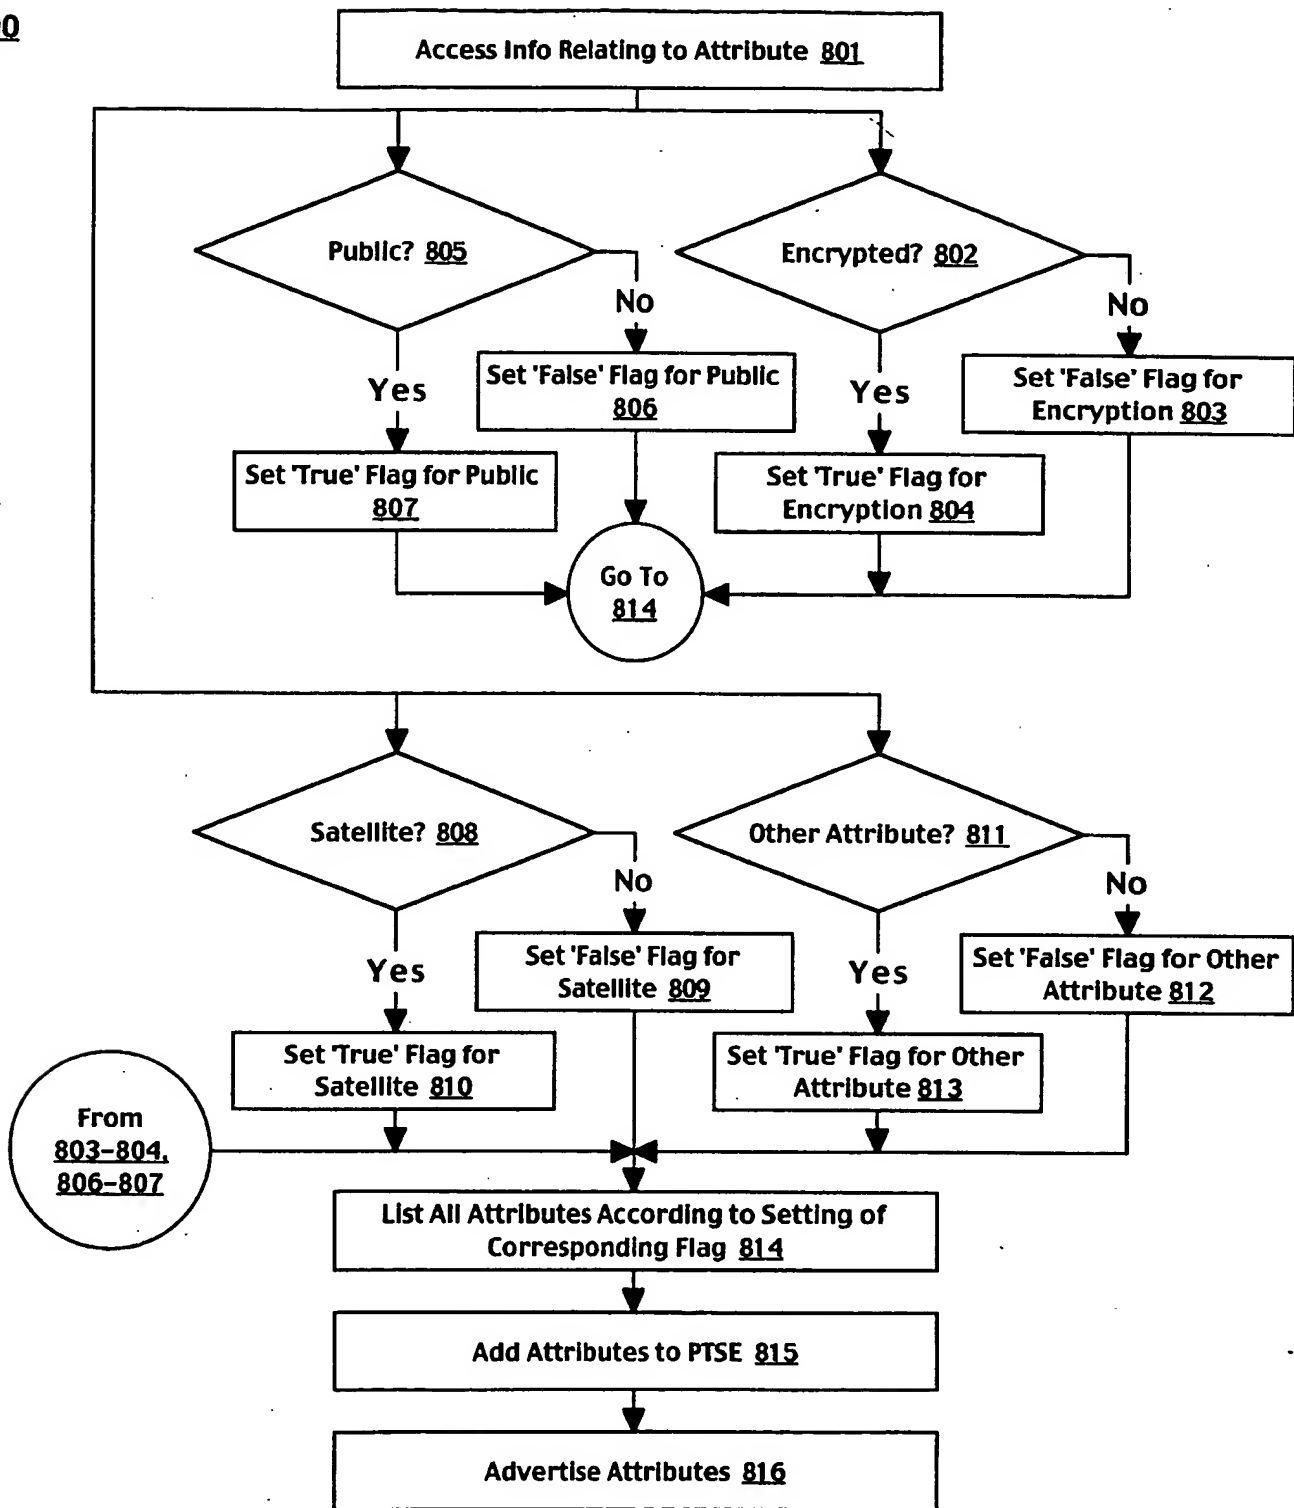**Fig. 8**